



BRONZE SOLENOID VALVES

Dependable • Packless

TYPE "M" - NORMALLY CLOSED 3/8" TO 3/4" PIPE SIZE

NO DIFFERENTIAL PRESSURE REQUIRED TO OPEN

DIRECT ACTING - ORIFICE SIZES 1/8" TO 1/2"

OPERATION:

Valve opens when energized and closes when de-energized. In this direct acting valve, when the coil is energized, the stem is lifted from its conical seat by the plunger.

CONSTRUCTION: (* Wetted parts)


- *Valve Body - Cast Bronze, Globe Pattern - NPT ends
- Coil Enclosure - Malleable Iron, 1/2" NPS conduit conn.
- *Plunger - 430 Stainless Steel
- *Valve Stem - 303 Stainless Steel
- *Bonnet Tube - 304 Stainless Steel
- *Spring - Inconel
- *Body Seal - Non Asbestos Gasket
- *Orifice Seal - Metal to Metal
- *AC Shading Coil - Copper
- *Stem Pin - Inconel
- Coil - Encapsulated Class H, 18" leads

APPLICATION:

To control the flow of **Steam, Hot Liquids, Hot Gases, Cryogenics**** and any other fluids not reactive with construction materials and free of sediment. Cryogenic fluids include Liquid Oxygen (-297°F), Liquid Argon (-303°F) and Liquid Nitrogen (-320°F). Valve operates from zero to maximum differential pressure indicated in table. Valve must be mounted in horizontal pipe with solenoid enclosure vertical and on top.

****Cleaning:**

- Cryogenic valves are degreased and cleaned to keep them free of moisture.
- Oxygen valves are also "black light" tested.

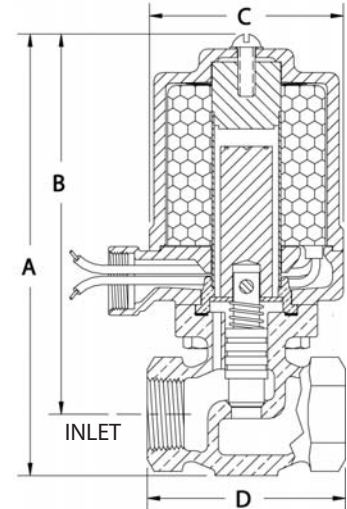

MAX. FLUID TEMP.
400° F
MAX. STATIC PRESSURE
150 PSI



FOR OPTIONS & ACCESSORIES
SEE PAGES 24 & 25

Pipe Size Inches	Max. Diff. PSI	Valve Port Size	Type No.	Watts AC	Amps Hold 120-60	Amps Inrush 120-60	Watts DC	Ship Wt. Lbs.	Dimensions In Inches												
									A	B	C	D									
3/8	25	3/8	10M21	25	0.4	1.1	18	6	6-1/4	5-1/2	2-7/8	2-5/8									
	50	1/4	10M41																		
	75	3/16	10M51																		
	100	5/32	10M81																		
	150	1/8	10M61																		
	50	3/8	25M21										45	0.8	2.3	23	10	7-1/8	6-3/8	3-1/2	2-5/8
75	5/16	25M31																			
100	1/4	25M41																			
150	3/16	25M51																			
25	3/8	10M22	25	0.4	1.2	18	6	6-1/4	5-1/2	2-7/8	2-3/4										
50	1/4	10M42																			
75	3/16	10M52																			
100	5/32	10M82																			
150	1/8	10M62																			
50	3/8	25M22										45	0.8	2.4	23	10	7-1/8	6-3/8	3-1/2	2-3/4	
75	5/16	25M32																			
100	1/4	25M42																			
150	3/16	25M52																			
3/4	15	1/2	10M13	25	0.4	1.3	18	7	6-1/2	5-5/8	2-7/8										2-7/8
	35	5/16	10M33																		
	30	1/2	25M13																		
	75	5/16	25M33																		

Strainers are recommended for use with solenoid valves (See page 19)

When you order please supply the following:

- Pipe Size
- Valve Type
- Voltage (AC or DC)
- Hertz
- Fluid
- Fluid Temperature
- Max. Diff. Pressure
- Optional Features

(See pages 24 & 25)