
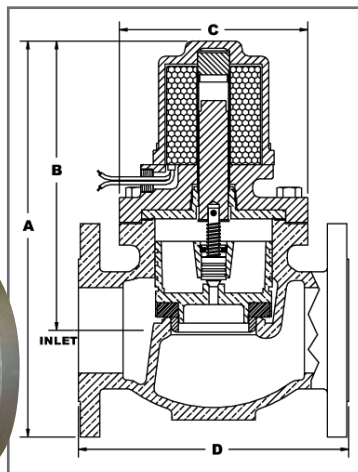


BULLETIN 3020-K

MAX. FLUID TEMP. 400° F
 MAX. STATIC PRESSURE 300 PSI
 (Except valves listed for 500 PSI)

STAINLESS STEEL Solenoid Valves

TYPE K FULL PORT NORMALLY CLOSED - 1/2" to 3" PIPE SIZE
 (NO DIFFERENTIAL PRESSURE REQUIRED TO OPEN)

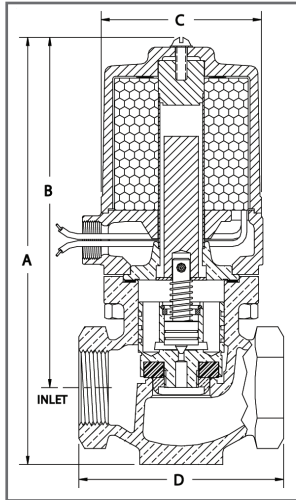

OPERATION: Valve opens when energized and closes when de-energized. When the coil is energized the pilot valve opens, relieving the pressure above the piston, which is then lifted from its seat by the plunger. Upon de-energizing the coil, a spring closes the pilot valve and opens a bleed passageway to permit pressure to build above the piston and seat it.

CONSTRUCTION: *Wetted parts - No Copper Bearing Alloys in contact with fluid

- Valve Body* - 304 Stainless Steel Globe Pattern - AC Shading Coil* - Silver
- NPT ends (Flanged Ends available)
- Piston* - 303 Stainless Steel - Stem Pin* - Inconel
- Coil Enclosure - Malleable or Cast Iron, 1/2" NPS conduit conn. - Coil - Encapsulated Class H, 18" leads
- Plunger* - 430 Stainless Steel
- Pilot Valve* - 303 Stainless Steel
- Bonnet Tube* - 304 Stainless Steel
- Spring* - Inconel
- Body Seal* - Non Asbestos Gasket (Teflon® available)
- Orifice Seal* - Glass Filled Teflon®

**FOR
 STEAM APPLICATIONS
 SEE BULLETIN 3020-W
 Page 24**

APPLICATION: To control the flow of Corrosive Fluids, Deionized Water, Condensate, Ammonias, Vegetable Oils, Fuel Oils, Cryogenics**, and Flammable Liquids. Cryogenic fluids include Liquid Oxygen (-297°F), Liquid Argon (-303°F) and Liquid Nitrogen (-320°F). Valve operates from zero to maximum differential pressure indicated in table. Valve must be mounted in horizontal pipe with solenoid enclosure vertical and on top.

- **Cleaning** - Cryogenic valves are degreased and cleaned to keep them free of moisture.
 - Oxygen valves are also "black light" tested.



For Options and Accessories see pages 26 & 27. Strainers are recommended for use with solenoid valves (see page 19).

When ordering please supply:

- Pipe Size
- Fluid
- Valve Type
- Fluid Temperature
- Voltage (AC or DC)
- Max. Diff. Pressure
- Hertz
- Optional Features (See pages 26 & 27)

Shipping Weights shown here apply to Threaded Ends Only (except 3" which are Flanged Only)

For Flanged Ends contact factory for complete weight and dimensions

3" STAINLESS STEEL VALVES are SUPPLIED with FLANGED ENDS ONLY

Pipe Size Inches	Max. Diff. PSI	Type No.	Watts AC	Amps Hold 120-60	Amps Inrush 120-60	Watts DC	Ship Wt. Lbs.†	Dimensions in Inches					
								A*	B	C	D NPT	D (Flanged) 150#	D (Flanged) 300#
1/2	110	14K42	25	0.4	1.2	18	7	7	5-7/8	2-7/8	3-1/4	6	6-1/2
	200	14K32											
	300	29K52	45	0.8	2.4	23	10	8	6-7/8	3-1/2			
	500	E29K62					15			4			
3/4	110	14K43	25	0.4	1.3	18	8	7-1/8	6	2-7/8	3-1/2	6	6-1/2
	200	29K33	45	0.8	2.6	23	11			4			
	300	129K53	65	1.2	3.9	33	16	8-1/8	7	3-1/2			
	500	E129K63								4			
1	110	16K44	25	0.4	1.5	18	10	8	6-5/8	3-1/4	4-1/8	6-1/2	7-1/2
	200	31K34	45	0.8	2.8	23	13			4			
	300	131K54	65	1.2	4.2	33	18	8-7/8	7-1/2	3-1/2			
	500	E131K64								4			
1-1/2	115	35K46	45	0.8	3.2	23	17	10	8-1/8	4	4-7/8	6-1/2	7-1/2
	200	41K36	60	1.2	6.7	35	21			4			
	300	141K56	85	2.0	10.0	45	21	11	9-1/8	4-1/2			
	500	141K66								4			
2	100	36K47	45	0.8	3.5	23	27	11	8-3/4	5-3/8	6	8	9
	200	42K37	60	1.2	7.4	35	32						
	300	42K57	85	2.0	11.0	45	32	12	9-3/4	5-3/8			
	500	142K67								4			
3	100	44K49F1	60	1.2	8.8	35	68	13-3/4	10-1/2	6-5/8	N/A	9-1/2	N/A
	200	44K39F1	85	2.0	13.0	45	81					N/A	12-1/2
	300	144K59F3											

† Shipping weights and Dimension "A" apply to NPT Ends