

BRONZE SOLENOID VALVES

Dependable • Packless




“GRITTY COOLANT” FULL PORT - NORMALLY OPEN 1/2” TO 1-1/2” PIPE SIZE

NO DIFFERENTIAL PRESSURE REQUIRED TO OPEN

OPERATION:

Valve closes when energized and opens when de-energized. When the coil is energized the plunger presses the poppet, closing the pilot orifice, and opens a bleed passageway to permit pressure to build above the piston and sealing it. Upon de-energizing the coil, the pilot orifice is opened, relieving the pressure above the piston, allowing it to leave its seat. The bottom spring allows the valve to operate at zero pressure drop.

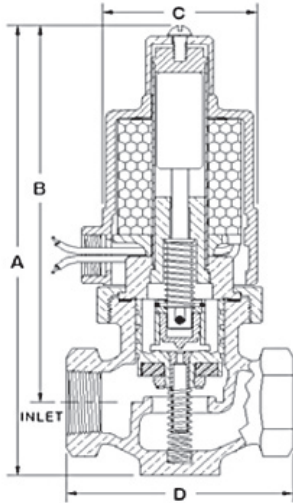

CONSTRUCTION: (* Wetted parts)

- *Valve Body - Cast Bronze, Globe Pattern - NPT ends
- *Piston - Cast Bronze
- Coil Enclosure - Malleable or Cast Iron, 1/2” NPS conduit conn.
- *Plunger - 430 Stainless Steel
- *Poppet - 303 Stainless Steel
- *Stem - 303 Stainless Steel
- *Bonnet Tube - 304 Stainless Steel
- *Spring - Inconel and 302 Stainless Steel
- *Body Seal - Buna N or Non Asbestos Gasket
- *Orifice Seal - Buna N (Viton or Glass Filled Teflon available)
- *AC Shading Coil - Copper
- *Stem Pin - 304 Stainless Steel
- Coil - Encapsulated Class B, 18” leads - (Class H available)

APPLICATION:

To control the flow of **Water, Oil, Air, Gas, Solvents, Brine, Vacuum** and any other fluids not reactive with construction materials and free of sediment. Valve operates from zero to maximum differential pressure indicated in table. Valve must be mounted in horizontal pipe with solenoid enclosure vertical and on top.



MAX. FLUID TEMP.
212° F

MAX. STATIC PRESSURE
300 PSI

Except valves listed for 500 PSI

**FOR OPTIONS & ACCESSORIES
SEE PAGES 26 & 27**

Strainers are recommended for use with solenoid valves

(See page 19)

Pipe Size Inches	Max Diff. PSI	Type No.	Watts AC	Watts AC	Ship Wt. Lbs.	Dimension In Inches			
						A	B	C	D
1/2	200	MS33AR42-C	45	23	8	9-3/8	8-1/4	4-1/8	3-1/4
	50	MS18AR23-C	25	18	9	8-1/4	7-1/8	2-3/4	3-1/2
3/4	110	MS233AR43-C	80	40	13	9-1/4	8-1/8	3-1/2	3-1/2
	110	MS33AR44-C	45	23					
1	200	MS233AR24-C	80	40	14	10	8-5/8	3-1/2	4-1/8
	300	MS233AR44-C	80	40					

“A” Dimension does not include the “MS” Mounting Stud (Approx. 7/8”)

Note: The addition of any bottom mounted option would replace the “MS” Mounting Stud and change the prefix to reflect the appropriate option.

When you order please supply the following:

- Pipe Size
- Valve Type
- Voltage (AC or DC)
- Hertz
- Fluid
- Fluid Temperature
- Max. Diff. Pressure
- Optional Features

(See pages 26 & 27)

†† Not available for DC operation